


ASI1201E

Dahua ASI1201E suya davamlı RFID standalone giriş nəzarət cihazıdır. İstifadəçilərin kart və şifrə ilə girişini dəstəkləyir, daxili və açıq havada quraşdırıla bilər. Sadə, etibarlı və davamlı quruluşu ilə ofis, bina və müəssisələr üçün ideal seçimdir.

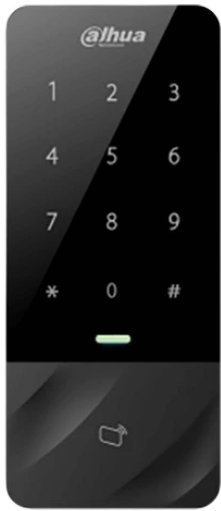

Specifications

Model	ASI1201E
Brand	Dahua
Cihaz tipi	Reader
Kart tipi	IC
Qoʻulma	Lan
Qoruma	IP66

KEY FEATURES

Technical Specification		
Mode	ASI1201E	ASI1201E-D
System		
Main Processor	32 Bit	
Input/Output Ports		
Input	Door sensor x 1, Exit button x 1	
Output	Relay x 1 (Door lock,)	
Reader	Reader x 1	
Card Read		
Read Format	13.56MHz	125KHz
Read Range	1cm–2cm (max.)	
Response Time	<0.1s	
Capacity		
Cardholders	30,000	
Events	60,000	
Function		
User Management	General, VIP, Guest, Patrol, Block list, Duress	
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm	
Period Setting	Support 128 groups of schedule, 128 groups of periods and 128 groups of holiday periods	
Interface		
To PC	RJ45(10/100M)	
To Reader	Wiegand26/34, RS485	
General		
Ingress Protection	IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)	
RTC	Yes	
Beep Tone	Buzzer	
Keyboard	Sensitive touch keypad with blue backlight	
Power Supply	DC 9-15V/100mA	
Operating Temperature	-30°C to +55°C	
Working Humidity	10%RH–90%RH (no-condensation)	
Dimension(W×D×H)	62.0mm×142.0mm×23.0mm	
Weight	0.5kg	
Working Environment	Outdoor	
Certificates		
CE	Yes	
FCC	Yes	