


# DS-K1A802AEF

DS-K1A802AEF ACCESS CONTROLLER HIKVISION

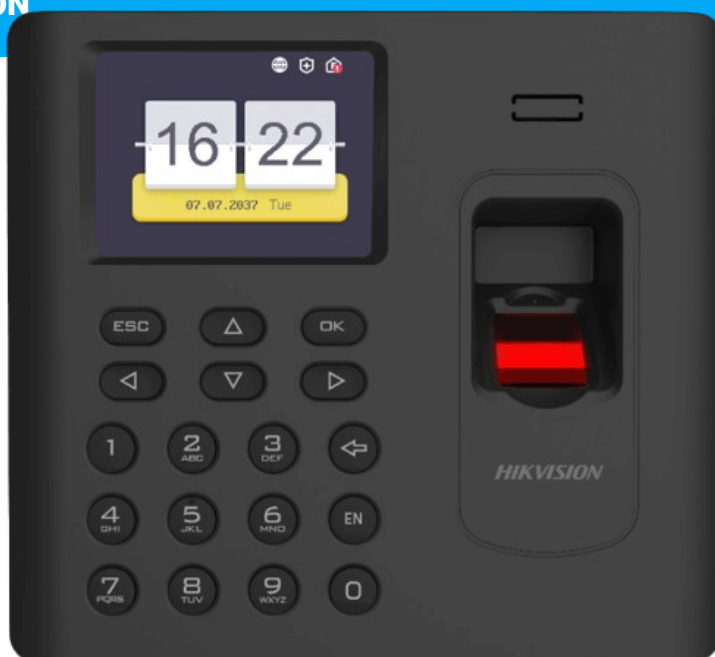

## Specification

<b>System</b>	
Operating system	Linux
<b>Screen</b>	
Screen Size	2.4-inch
Type	LCD-TFT display screen
<b>Audio</b>	
Audio output	1 loudspeaker, 1 buzzer
<b>Network</b>	
Wired network	TCP/IP, 10/100Mbps, self-adaptive
Wi-Fi	Support
<b>Interface</b>	
Network interface	1
USB	1
<b>Capacity</b>	
Card capacity	3000
Fingerprint capacity	3000
Event capacity	100,000
<b>Authentication</b>	
Card type	EM card
Card reading distance	0 to 5 cm
Card reading duration	≤ 1 s
Fingerprint module	Optical fingerprint module

Fingerprint comparing mode	1:1 and 1:N
Fingerprint recognition duration	≤ 1 s
Fingerprint FAR	≤ 0.001 %
Fingerprint FRR	≤ 0.01 %
Others	
Indicator	Power/status (red/green)
Power supply	5 VDC/1 A
Working temperature	-10 °C to +55 °C (14 °F to +131 °F)
Working humidity	10% to 90% (no condensing)
Color	Black
Dimensions	140 mm × 155 mm × 30 mm (5.51" × 6.01" × 1.18")
Application environment	Indoor
Installation	Surface mounting, desk stand