


# DS-KV6103-PE1(C)

Hikvision IP domofon DS-KV6103-PE1(C) qapı zəngi; 2 MP; Bucaq - 131°; WDR; IP65; Qara; Metal; PoE;

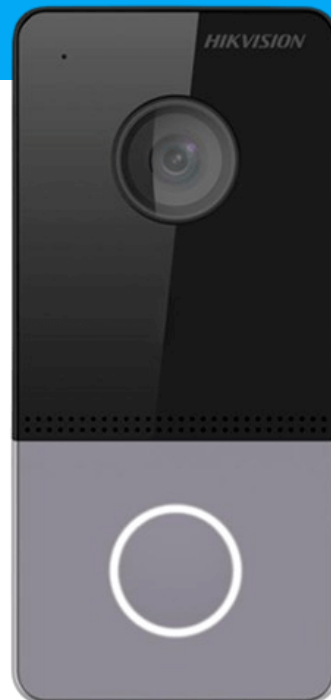

|               |                  |
|---------------|------------------|
| Model         | DS-KV6103-PE1(C) |
| Brend         | Hikvision        |
| Bağlantı tipi | IP               |
| Cihaz         | Zəng             |
| PoE           | PoE              |
| Material      | Metal            |

## Specification

### System parameters

|                  |                    |
|------------------|--------------------|
| operating system | Embedded Linux OS  |
| Inner memory     | 32 MB              |
| Memory           | 256 MB             |
| CPU              | Built-in processor |

### Display options

|             |   |
|-------------|---|
| Screen size | / |
| Control     | / |
| Type        | / |
| Permission  | / |

### Video options

|                            |  |
|----------------------------|--|
| Lens                       | 1  |
| Permission                 | Main stream: 1920 × 1080p, 720p<br>Sub stream: 704 × 576 |
| Viewing angle              | Horizontal: 131° Vertical: 78°                           |
| WDR                        | True WDR   |
| Additional lighting        | IR illumination  |
| Video compression standard | H.264  |

## Audio options

|                            |                                     |
|----------------------------|-------------------------------------|
| Audio compression standard | G.711 U                             |
| Audio input                | Built-in omnidirectional microphone |
| Audio output               | Built-in speaker                    |
| Audio bitrate              | 64 Kbps                             |
| Improved sound quality     | Noise and echo reduction            |
| Volume adjustment          | Customizable                        |

## Capacity

|                       |   |
|-----------------------|---|
| Number of users       | / |
| Number of face images | / |
| Number of cards       | / |

## Network settings

|                        |                          |
|------------------------|--------------------------|
| Communication protocol | TCP/IP, RSTP             |
| Wired network          | Auto 10 / 100 M Ethernet |
| Wi-Fi standard         | /                        |
| Bluetooth              | /                        |
| 3G/4G standard         | /                        |

## Device interfaces

|                     |   |
|---------------------|---|
| Alarm input         | 4 |
| Network interface   | 1 |
| Tamper              | 1 |
| Exit button         | 1 |
| RS-485              | 0 |
| USB                 | 0 |
| Wiegand             | 0 |
| TF card             | 0 |
| Alarm output        | 0 |
| Door lock indicator | 1 |
| Door contact input  | 1 |
| Power interface     | 1 |

## Basics

|                     |  |
|---------------------|--|
| Button              | 1  |
| Installation        | Overhead installation  |
| Indicator           | 0  |
| Weight              | 200 g  |
| Protection level    | IP65   |
| Working temperature | -40 to +53 °C  |
| Operating humidity  | From 10 to 95%   |
| Dimensions          | 138 × 65 × 27 mm   |
| Battery             | /  |
| terms of Use        | Outside the premises   |
| Power consumption   | ⊕ 10W  |
| Language            | English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian |