


GNT-P1012G6-F

GNT-P1012G6-F 8pGb +2SFP AI Gigabit Waterproof PoE Switch Genata

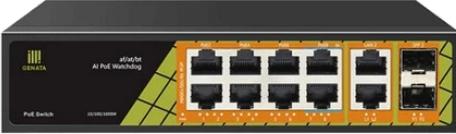

Specifications

Model	GNT-P1012G6-F
Brand	Genata
PoE gücü	120 W
Port say?	8 Port
PoE	PoE
Port sür?ti	1000mb/s

KEY FEATURES

GNT-P1012G6	Product Features
Total 120W PowerSupply 8 ports PoE	AI Watchdog Function
2 ports Uplink	6KV Lightning &8KV ESD Protection Support bt 60W High Power
2 ports SFP	
Specifications	
Ports	<p>PoE (1~6):10/100/1000Mbps PoE ports (RJ45)</p> <p>PoE (7~8):10/100/1000Mbps PoE ports (RJ45),Support bt 60W</p> <p>High Power LAN (1~2):10/100/1000Mbps uplink ports (RJ45)</p> <p>SFP (1~2):10/100/1000Mbps SFP ports</p>
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000 Mbps HalfDuplex
Transmission Distance	130m
Performance Specification	<p>Bandwidth:24Gbps</p> <p>NetworkLatency (10 to 1000Mbps): 16µs(use the 64bytepackage size) MAC address table: 8K</p> <p>The Frame Filter& Transmission Rate:14800pps the mostfor 10M port,</p> <p>148800pps the mostfor 100M port;1488000pps the most for1000M port</p>
Networking Standard	<p>IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T</p> <p>IEEE 802.3x FlowControl</p> <p>IEEE 802.3af/at/bt Powerover Ethernet</p>
Power Support	<p>Power Input: AC 90~240VTotal≤120W</p> <p>AI Watchdog: Port1~8</p> <p>Power Output: PoE1~6Port:1/2(+52V),3/6(GND)≤30W</p> <p>PoE7~8 Port:1245(+53V),3678(GND) Compatible1/2(+52V),3/6(GND)≤60W</p>
Protection Level	<p>Lightning Protection:6KV, Per: IEC61000-4-5</p> <p>ESD Protection:8KV, Per: IEC61000-4-2</p>
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm, Weight:1.0KG
Working Environment	<p>OperatingTemperature: -30~60 Storage Temperature: -40~70</p> <p>Operating Humidity: 10%~90% Non-condensing</p> <p>Storage Humidity: 5%~90% Non-condensing</p>

Certification	CEMark
	FCC Part15, ClassB RoHS 2.0
Package Content	AC Power Cable,User Manual