


GNT-P1012G6-F

GNT-P1012G6-F 8pGb +2SFP AI Gigabit Waterproof PoE Switch Genata

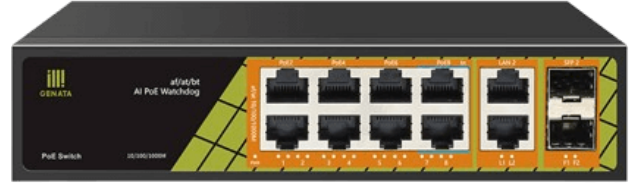

Model	GNT-P1012G6-F
Brend	Genata
PoE gücü	120 W
Port sayı	8 Port
PoE	PoE
Port sürati	1000mb/s

Specification

GNT-P1012G6	Product Features
Total 120W PowerSupply 8 ports PoE 2 ports Uplink 2 ports SFP	AI Watchdog Function 6KV Lightning & 8KV ESD Protection Support bt 60W High Power
Specifications	
Ports	PoE (1~6):10/100/1000Mbps PoE ports (RJ45) PoE (7~8):10/100/1000Mbps PoE ports (RJ45),Support bt 60W High Power LAN (1~2):10/100/1000Mbps uplink ports (RJ45) SFP (1~2):10/100/1000Mbps SFP ports
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000 Mbps HalfDuplex
Transmission Distance	130m
Performance Specification	Bandwidth:24Gbps NetworkLatency (10 to 1000Mbps): 16µs(use the 64bytepackage size) MAC address table: 8K The Frame Filter& Transmission Rate:14800pps the mostfor 10M port, 148800pps the mostfor 100M port;1488000pps the most for1000M port

Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x FlowControl IEEE 802.3af/at/bt Powerover Ethernet
Power Support	Power Input: AC 90~240V Totals 120W AI Watchdog: Port1~8 Power Output: PoE1~6 Port: 1/2(+52V), 3/6(GND) ≤ 30W PoE7~8 Port: 1245(+53V), 3678(GND) Compatible 1/2(+52V), 3/6(GND) ≤ 60W
Protection Level	Lightning Protection: 6KV, Per: IEC61000-4-5 ESD Protection: 8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm, Weight: 1.0KG
Working Environment	Operating Temperature: -30~60 Storage Temperature: -40~70 Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Certification	CE Mark FCC Part 15, Class B RoHS 2.0
Package Content	AC Power Cable, User Manual