


# GNT-P9828V6

GNT-P9828V6 8p 2Up-Link 250m AI Hybrid PoE Switch Genata

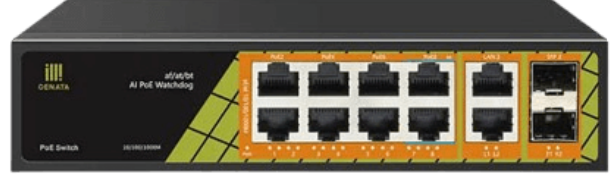

Model	GNT-P9828V6
Brend	Genata
PoE gücü	120 W
Port sayı	8 Port
PoE	PoE
Port sürati	100mb/s

## Specification

DATA SHEET	
Port	2*100Mbps Uplink ports +8*100Mbps PoE ports
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000Mbps Half Duplex
Max transmission distance	130m
Power support	<p>Power input: AC 110~220V Totals120W</p> <p>PoE Watchdog: Port 1-8</p> <p>Power output: PoE1~6Port:1/2(+52V),3/6(GND)≤30W</p> <p>PoE7~8Port:1245(+53V),3678(GND) compatible1/2(+52V),3/6(GND)≤60W</p>
Ports(1-6)Support	IEEE 802.3af/at protocol
Ports(7-8)Support	IEEE 802.3af/at/bt protocol
Performance Specification	<p>Bandwidth: 2 Gbps</p> <p>Network Latency (10 to 1000Mbps): ≤16μs (use the 64byte package size)</p> <p>MAC address table: 2K</p> <p>The Frame Filter &amp; Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port,1488000pps the most for 1000M port</p>
Networking Standard	<p>IEEE 802.3i 10BASE-T</p> <p>IEEE 802.3u 100BASE-TX/ IEEE 802.3ab 1000BASE-T</p> <p>IEEE 802.3xFlowControl</p>

IEEE 802.3af/at/bt Power over Ethernet	
Protection Level	Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm
Working Environment	Operating Temperature: -30~60
	Storage Temperature: -40~70
	Operating Humidity: 10%~90% non-condensing
	Storage Humidity: 5%~90% non-condensing
Electromagnetic Compatibility	CE mark
	FCC Part15 Class B
	VCCI Class BENS5022 (CISPR 22)
	C-Tick
Other Functions	Short-circuit protection
	Over-Temperature protection
	Preventing surge
Package Content	AC Power Cable Installation Manual