


RB750r2 (HEX Lite)

MIKROTIK HEX Lite (RB750r2)

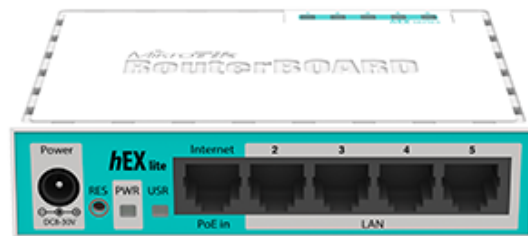

| | |
|-------------|--------------------|
| Model | RB750r2 (HEX Lite) |
| Brend | Mikrotik |
| Port sürəti | 100 mb/s |

Specification

| Details | |
|----------------------------|--|
| Product code | RB750r2 |
| Architecture | MIPSBE |
| CPU | QCA9533 |
| CPU core count | 1 |
| CPU nominal frequency | 850 MHz |
| Switch chip model | QCA9533 |
| Dimensions | 113x89x28mm. Weight without packaging and cables: 129g |
| RouterOS license | 4 |
| Operating System | RouterOS |
| Size of RAM | 64 MB |
| Storage size | 16 MB |
| Storage type | FLASH |
| MTBF | Approximately 100'000 hours at 25C |
| Tested ambient temperature | -40°C to 70°C |
| Number of DC inputs | 2 (DC jack, PoE-IN) |
| DC jack input Voltage | 6-30 V |
| Max power consumption | 2 W |
| Cooling type | Passive |
| PoE in | Passive PoE |
| PoE in input Voltage | 6-30 V |
| 10/100 Ethernet ports | 5 |
| Certification | CE, EAC, ROHS |
| IP | IP20 |