


TL-SL1311P

TP-LINK TL-SL1311P(UN) 8-PORT POE+ DESKTOP SWITCH + 3 PORT GIGABIT UPLINK

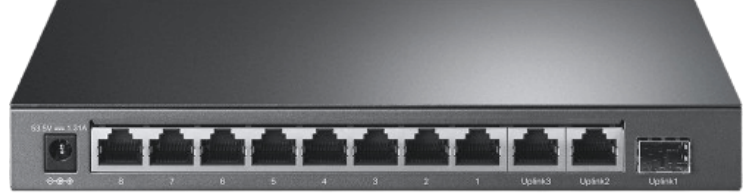

Model	TL-SL1311P
Brend	Tp-Link
PoE gücü	60 W
Port sayı	8 Port
PoE	PoE
Port sürəti	100mb/s

Specification

HARDWARE FEATURES	
Interface	<ul style="list-style-type: none"> • 8x 10/100 Mbps 802.3af/at PoE+ Ports, 2x Gigabit RJ45 Ports, 1x Gigabit SFP Port • AUTO Negotiation • AUTO MDI/MDIX
Network Media	<ul style="list-style-type: none"> • 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) • EIA/TIA-568 100Ω STP (maximum 100m) • 100BASE-TX: UTP category 5, 5e cable (maximum 100m) • EIA/TIA-568 100Ω STP (maximum 100m)
Fan Quantity	Fanless
Physical Security Lock	Yes
External Power Supply	External Power Adapter (Output: 53.5 VDC / 1.31 A)
Packet Forwarding Rate	5.6544 Mpps
PoE Ports (RJ45)	<ul style="list-style-type: none"> • Standard: 802.3 af/at compliant • PoE Ports: Ports 1-8 • Power Supply: 65 W
Mac Address Table	2K
Jumbo Frame	16 KB
Switching Capacity	7.6 Gbps
Dimensions (W x D x H)	8.2 x 4.9 x 1.0 in (209 x 126 x 26 mm)
Max. Power Consumption	<ul style="list-style-type: none"> • 5.61 W (220 V/50 Hz. no PD connected) • 77.32 W (110 V/50 Hz. with 65 W PD connected)
Max Heat Dissipation	<ul style="list-style-type: none"> • 19.13 BTU/h (no PD connected) • 263.7 BTU/h (with 65 W PD connected)
SOFTWARE FEATURES	

HARDWARE FEATURES

Advanced Features	<ul style="list-style-type: none">• Compatible With IEEE 802.3af/at Compliant PDs• Extend Mode Button (Ports 1-4 and Ports 1-8, Up to 250 m PoE power supply and data transmission)• Isolation Mode Button (Ports 1-8)• PoE Auto Recovery Button (Ports 1-8)• Mac Address Auto-Learning and Auto-Aging• IEEE802.3x Flow Control For Full-Duplex Mode And Backpressure for Half-Duplex Mode
Transmission Method	Store-And-Forward
OTHERS	
Certification	FCC, CE, RoHS
Package Content	<ul style="list-style-type: none">• TL-SL1311P• Power Adapter• Installation Guide
Environment	<ul style="list-style-type: none">• Operating Temperature: 0-40 ℃ (32-104 ℉)• Storage Temperature: -40-70 ℃ (-40-158 ℉)• Operating Humidity: 10-90% RH non-condensing• Storage Humidity: 5-90% RH non-condensing