


RB260GSP (CSS106-1G-4P-1S)

MikroTik RB260GSP (CSS106-1G-4P-1S) – 5 portlu smart switch, 4 passiv PoE çıxışı və 1 SFP portu ilə kiçik ofis və ev şəbəkələri üçün ideal seçimdir. Enerji ötürülməsi və şəbəkə idarəetməsini bir cihazda birləşdirir.

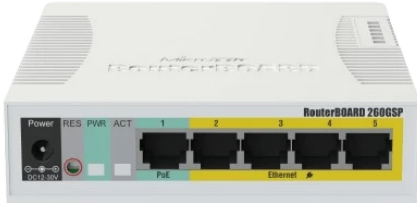

Specifications

Model	RB260GSP (CSS106-1G-4P-1S)
Brand	Mikrotik
Port say?	5 Port
Tip	Smart
PoE	PoE
Port sür?ti	1000mb/s
PoE gücü	60 W

KEY FEATURES

Details	
Product code	CSS106-1G-4P-1S
Switch chip model	QCA8337
Dimensions	113x139x28mm
Operating System	MikroTik SwOS
Storage size	128 KB
Storage type	FLASH
MTBF	Approximately 100'000 hours at 25C
Tested ambient temperature	-20°C to 70°C
Details	
Number of DC inputs	2 (PoE-IN, DC jack)
DC jack input Voltage	11-30 V
Max power consumption	53 W
Max power consumption without attachments	5 W
Cooling type	Passive
PoE in	Passive PoE
PoE in input Voltage	11-30 V
Details	
PoE-out ports	Ether2-Ether5
PoE out	Passive PoE
Max out per port output (input 18-30 V)	1 A
Max total out (A)	2 A
Details	
10/100/1000 Ethernet ports	5
Details	
SFP DDMI	Yes
SFP ports	1
Details	
PCB temperature monitor	Yes
Voltage Monitor	Yes
Details	
Certification	CE, EAC, ROHS
IP	IP20